

Utfärdare Issued by Aussteller	<b>Bertil Nyström</b>	Datum Date Datum	<b>2011-02-04</b>	Produkt Product Produkt	<b>Gearbox oil</b>
Från maskin nr. From machine No. Von Maschine Nr.	-	Till To Zu	-	Berör/Concerns/Betrifft <b>Oil for Alimak's spur gear and worm gear</b>	

**Alimak Hek AB has introduced a new gearbox oil with two viscosity classes, which can be used in both our spur gear and worm gear. This oil replaces our earlier recommended oil types.**

The new oil is of a full synthetic type and covers a wide temperature range. The oil has very good greasing performances and contains corrosion inhibitors for protection. The oil can be mixed with Alimak's earlier used oil types Alioil Artic, Alioil HD and Alioil Tropic.

**Alioil VN (Viscosity VG 460)**



Optimal surrounding temperature  
-20 to +40 degrees C

Part No. 9041 980-000 (1 L)

**Alioil VC (Viscosity VG 150)**

Optimal surrounding temperature  
-40 to +10 degrees C

Part No. 9040 996-000 (1 L)

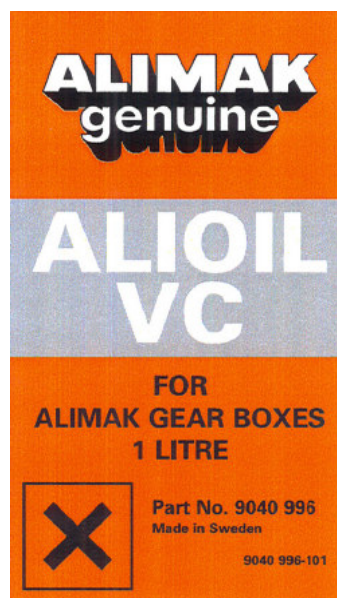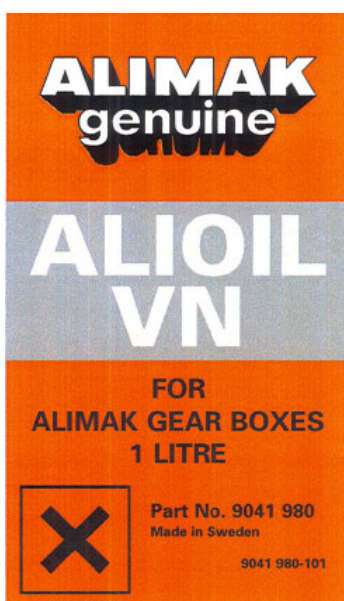

*Please forward this instruction to all people concerned before inserting it in your Service Manual under index 2, Service Instructions!*

*Form approved by Patrik Sundqvist, After Sales Manager. Date: 2009-02-02*