


SERVICE INSTRUCTION MS 14-2009E

Sid/Page 1(1)

Utfärdare Issued by Aussteller Bertil Nyström	Datum Date Datum 2009-09-22	Produkt Product Produkt Scando 450 and Scando 650
Från maskin nr. From machine No. Von Maschine Nr. All	Till To Zu -	Berör/Concerns/Betrifft Cage door magnet

Information about cage door magnet, with part No. 3002143-103


On certain occasions malfunctions have occurred on this magnet. The reason for this was that the contact with the built-in rectifier on the magnet was burnt.

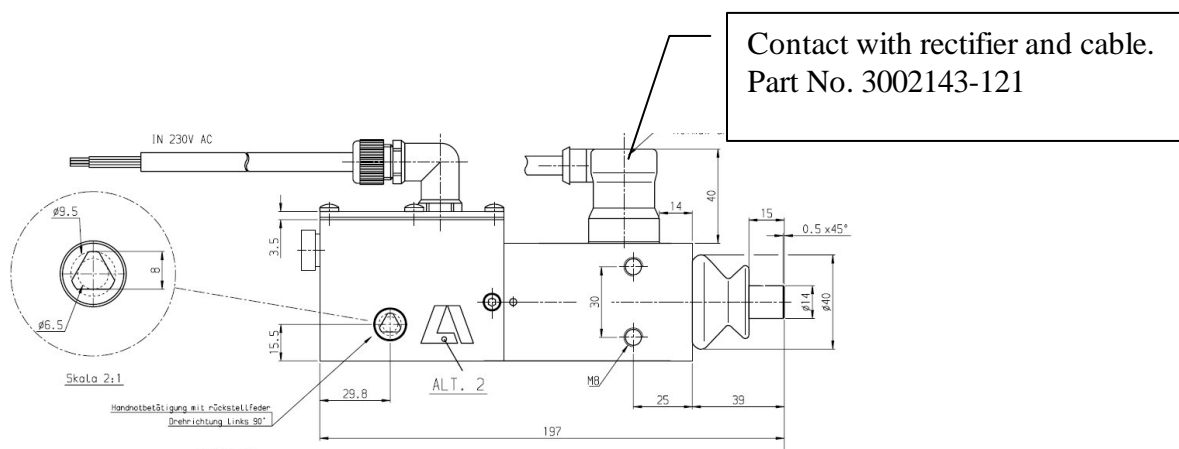

On newer magnets a new contact with rectifier and cable has been applied. The part No. 3002143-121 is the same as before.

The new contact has a better electrical insulation and resists larger voltage variations.

Visible differences between new and old version :

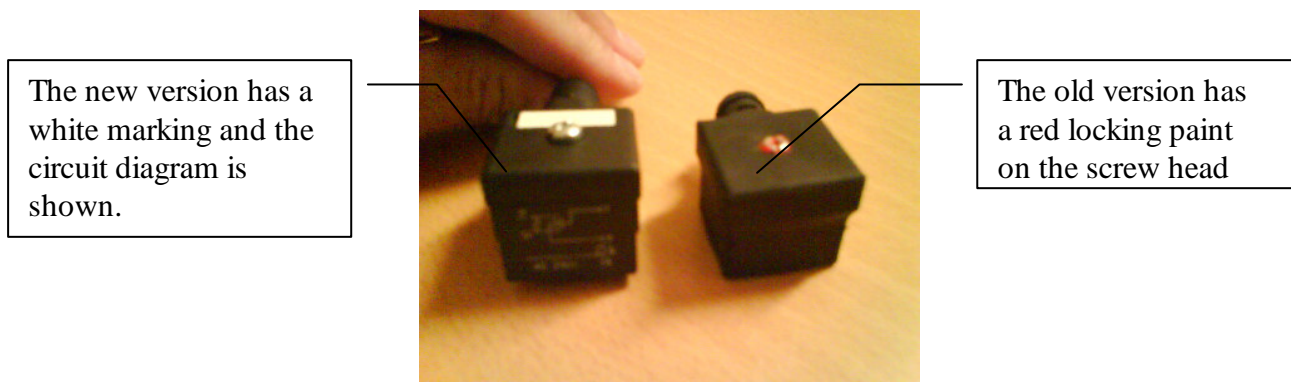

Please forward this instruction to all people concerned before inserting it in your Service Manual under index 2, Service Instructions!