

ALIMAK

## SCANDO® 12/30 TD &amp; 20/30 TD

## Technical Data

CAPACITY		SCANDO	
		12/30 TD	20/30 TD
Pay-load capacity	kg	1200	2000
Erection load	kg	1200	2000
Speed 50 Hz/60 Hz	m/min	40/40	40/40
Max. lifting height	meter	150	150
<b>Increased lifting height on request</b>			
Erection crane capacity	kg	250	250
Safety device	type	GF	GFD

## CAGE DIMENSIONS

Internal width x length	meter	1.3 x 3.0	1.3 x 3.0
Internal min. height	meter	2.55	2.55
Door opening w x h	meter	1.23 x 2.0	1.23 x 2.0


## ELECTRICAL DATA

Power supply range	380 – 690 V, 50 or 60 Hz, 3 Phase		
At 400 V/50 Hz:			
Power supply fuses	A	63	80
Rated power cont. duty	kW	2 x 7.5	3 x 7.5
Rated power 25% int. duty	kW	2 x 9.5	3 x 9.5
Starting current	A	200	300
Power consumption	kVA	26	39

## Data at other voltages on request

## WEIGHTS

Base unit weight	kg	2400	2680
Mast section with one rack	kg	130	130
Mast section with two racks	kg	154	154
Mast section length	mm	1508	1508

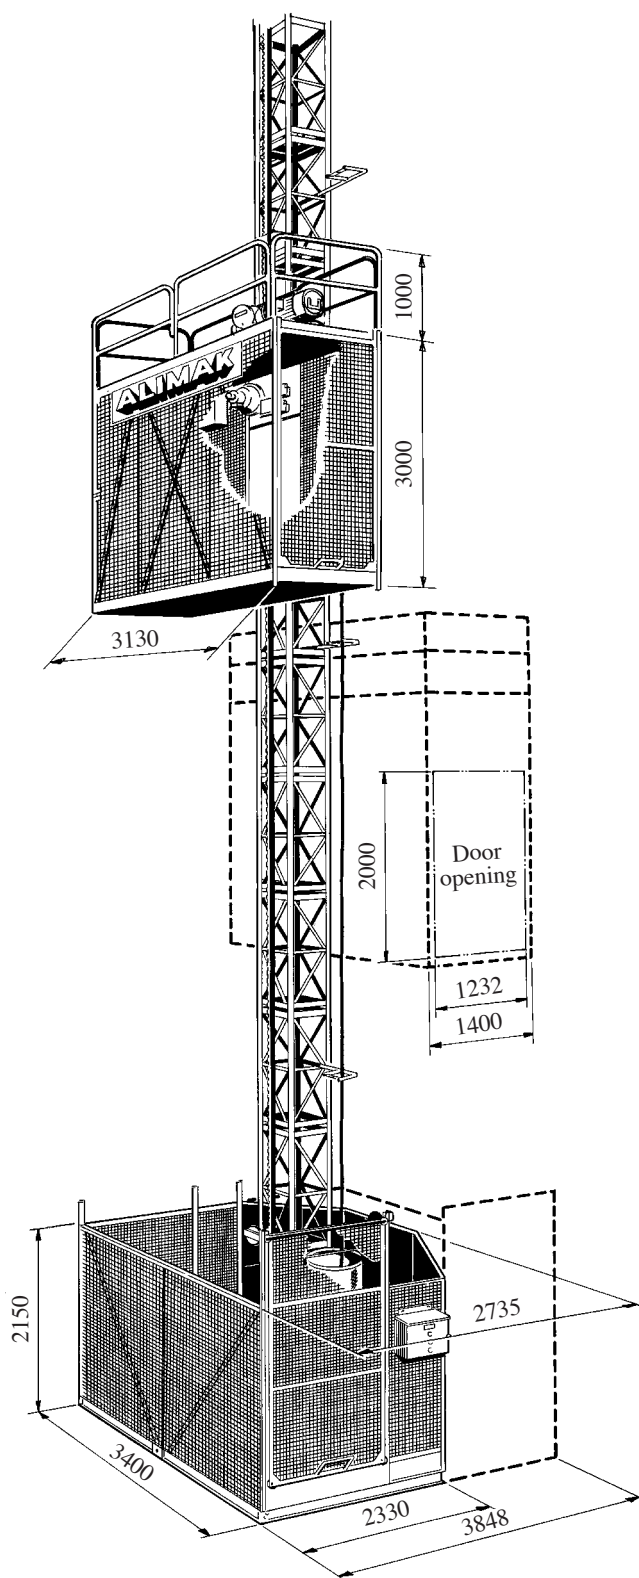



MEMBER OF THE ATLE KAROLIN GROUP

Alimak AB, P.O. Box 720, S-931 27 Skellefteå, Sweden.  
Tel. +46 910 87000. Fax +46 910 56690.  
E-mail: [info@alimak.se](mailto:info@alimak.se) Internet: <http://www.alimak.se>

Alimak have subsidiaries in: Great Britain, Germany, France, USA, Canada, Australia, Singapore, Brazil, Italy as well as in South Korea and, furthermore, 40 independent distributors around the world.

Pictures are illustrative only and do not necessarily show the configuration of products on the market at a given point in time. Products must be used in conformity with safe practice and applicable statutes, regulations, codes and ordinances. Specifications of products and equipment shown herein are subject to change without notice.