

ALIMAK SCANDO® 10/32 & 20/32

Technical Data

CAPACITY		SCANDO	
		10/32	20/32
Pay-load capacity	kg	1000	2000
Erection load	kg	1000	2000
Speed 50 Hz/60 Hz	m/min	40/40	40/40
Max. lifting height	meter	150	150
Increased lifting height on request			
Erection crane capacity	kg	250	250
Safety device	type	GF	GFD

CAGE DIMENSIONS

Internal width x length	meter	1.5 x 3.2	1.5 x 3.2
Internal min. height	meter	2.55	2.55
Door opening w x h	meter	1.49 x 2.0	1.49 x 2.0

ELECTRICAL DATA

Power supply range 380 – 690 V, 50 or 60 Hz, 3 Phase


At 400 V/50 Hz:

Power supply fuses	A	63	80
Rated power cont. duty	kW	2 x 7.5	3 x 7.5
Rated power 25% int. duty	kW	2 x 9.5	3 x 9.5
Starting current	A	200	300
Power consumption	kVA	26	39

Data at other voltages on request

WEIGHTS

Base unit weight	kg	2670	2870
Mast section with one rack	kg	130 – 170	130 – 170
Mast section with two racks	kg	155 – 190	188 – 226
Mast section length	mm	1508	1508

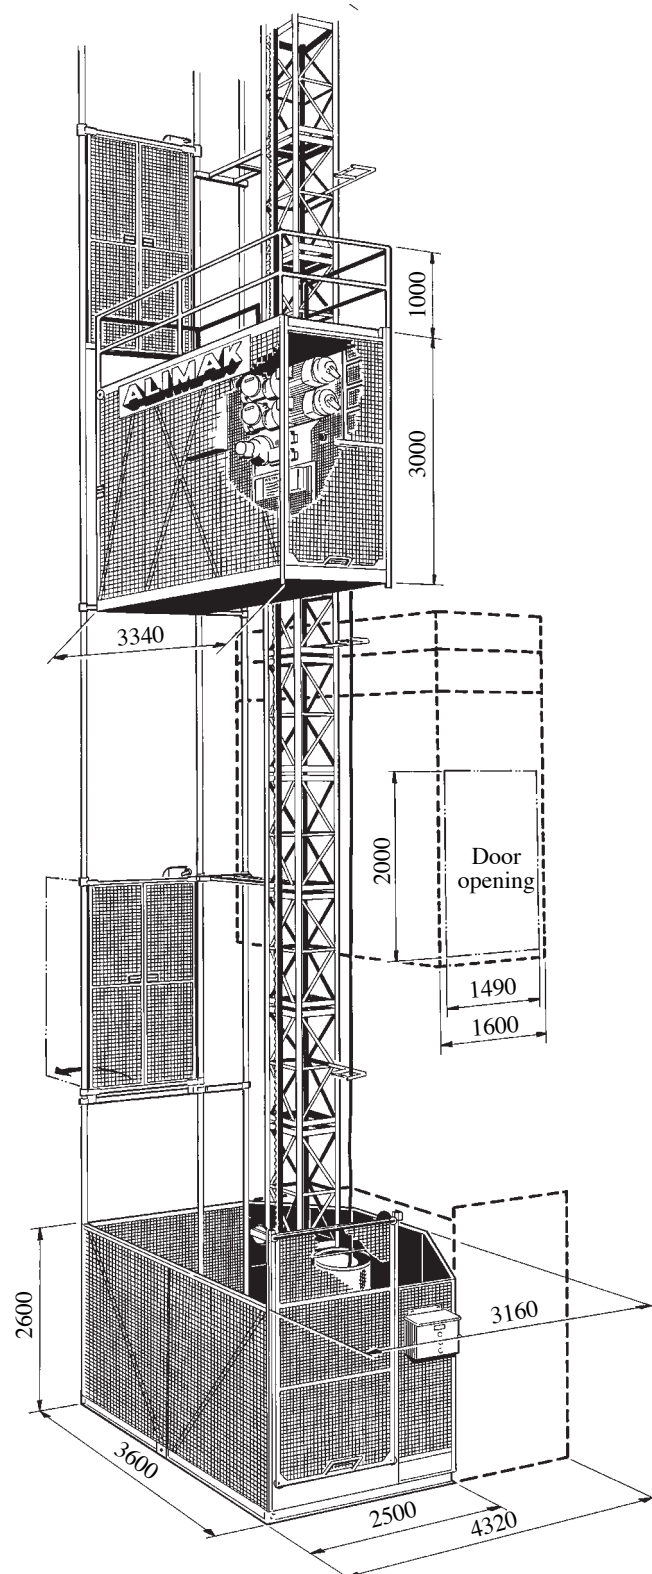



MEMBER OF THE ATLE KAROLIN GROUP

Alimak AB, P.O. Box 720, S-931 27 Skellefteå, Sweden.
Tel. +46 910 87000. Fax +46 910 56690.
E-mail: info@alimak.se Internet: <http://www.alimak.se>

Alimak have subsidiaries in: Great Britain, Germany, France, USA, Canada, Australia, Singapore, Brazil, Italy as well as in South Korea and, furthermore, 40 independent distributors around the world.