





HEK Manufacturing BV

GTP Dual 1500 Transport Platform

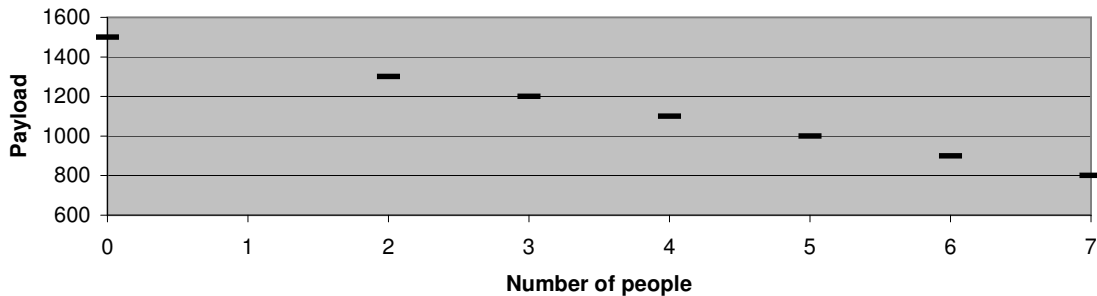

Technical Data		Transport	Material
Capacity		Platform	General Hoist
Platform dimensions	m	4,0 / 1,6	
Max Payload capacity	kg	1500	
Speed	m/min	12	24
Number of people	Qty	2 - 7	Forbidden
Operated from		From platform	Remote control
Max lifting height untied on groundframe	m	0	
Max lifting height tied	m	120	
Tie distance	m	6 - 8	
Max mastheight above last anchor	m	3	

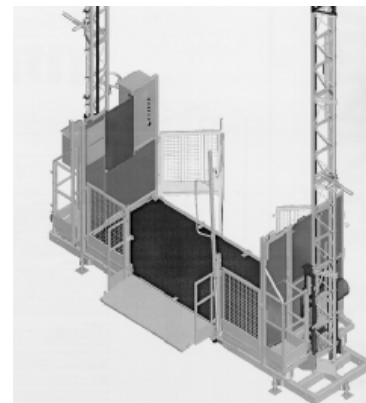

Dimensions and weights		
Outside dimensions: length	m	6,2
width	m	1,8
Height to platform	m	0,67
Basic machine weight	kg	2465
Dimensions mast section (Length x width x depth)	mm	1508 x 400 x 315
Weight mast section	kg	50
Mast bolts	Type	M14 x 90 qual. 8,8
Mast bolt torque	Nm	110

Electrical Data			Safety equipment
Rated power	kW	2 x 4,8	Electrically protected mast guard
Voltage	V	370 - 420	Mechanical protection safety barrier
Control Voltage	V	24 / 48	Electrically protected mast lifting aid
Motorbrakes	VAC	230	Manual brake release in emergency
Power supply fuses	V	220	(Ultimate) Upper limit switch
Control Voltage Frequency	Hz	50	(Ultimate) Lower limit switch
Building site fuse (slow)	A	32	Centrifugal brake
Nominal / Starting current	A	18 - 70	Electrical protection loading ramp
Power consumption	kVa	11	Overload protection