





HEK Manufacturing BV

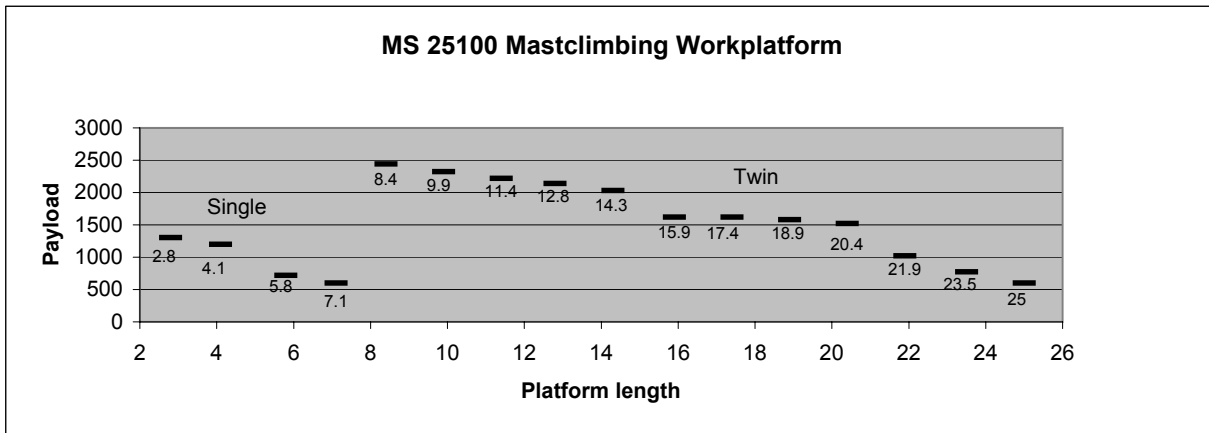

Technical Data		Single	Twin
Capacity			
Min/ Max platform length	m	2.8 / 7.1	8.4 / 2440
Max Payload capacity	kg	1300	2440
Speed	m/min	6.6	6.6
Max lifting height untied on groundframe	m	0	0
Max lifting height tied	m	100	100
Tie distance	m	6	6
Max mastheight above last anchor	m	3	3

Dimensions and weights			
Lowest transport height	mm		1800
Height to platform	mm		1500
1.5m platform section	kg		79
	mm		1500 x 1000
0.8m platform section	kg		49
	mm		820 x 1000
1.5m mast section	kg		51
Drive unit	kg		405
	mm		1100 x 1100 x 900
Groundframe	kg		231
	mm		1700 x 1890

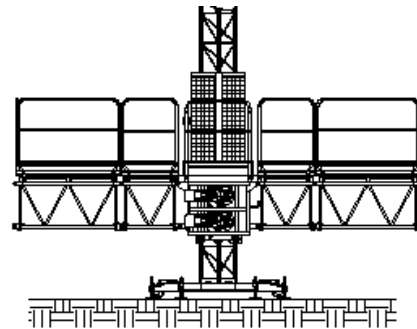

Electrical Data				Safety equipment
Rated power	kW	2 x 1.5	4 x 1.5	Overrun limit switches during erection
Voltage	V		380	Overrun limit switch in service
Control Voltage	V		220	Safety switch at access door
Control Voltage Frequency	Hz		50	Centrifugal brake
Starting current	A	20	40	Manual brake release in emergency
Power consumption	kW	2 x 1.5	4 x 1.5	Upper limit switch
Power supply fuses	V	220	220	Lower limit switch