





HEK Manufacturing BV

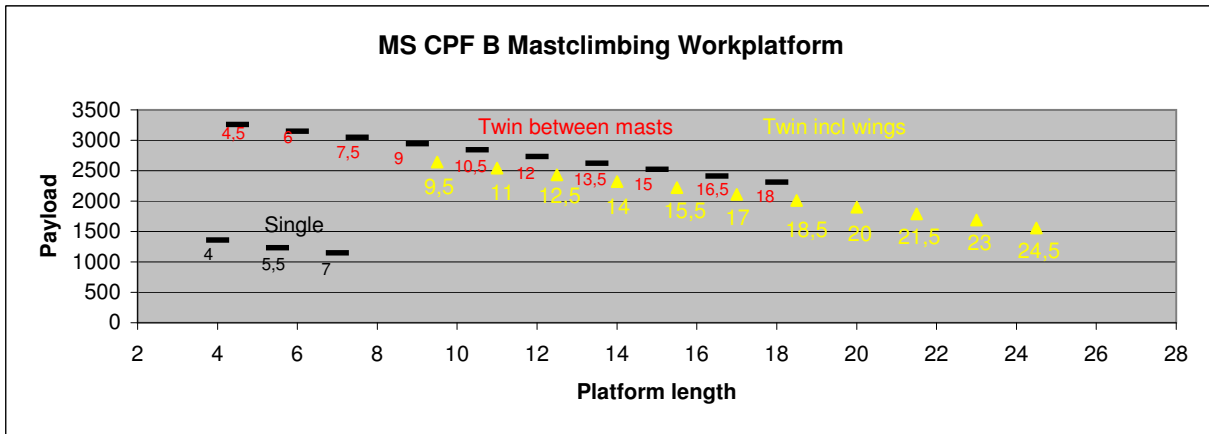

Technical Data		Single	Twin
Capacity			
Min/ Max platform length	m	4,0 / 7,0	9,5 / 24,6
Without outside decks			4,5 / 18,0
Max Payload capacity	kg	1360	3050
Speed	m/min	12	12
Max lifting height untied on groundframe out- /indoor	m	3 / 6	8 / 10
Max lifting height untied on chassis	m	9 / -	12 / -
Max lifting height tied	m	100	100
Tie distance	m	9	12
Max mastheight above last anchor	m	4,9	4,5
Persons allowed		4	6

Dimensions and weights		
Lowest transport height	mm	1550
Height to platform	mm	750
1.5m platform section	kg	93
0.8m platform section	kg	56
1.5m mast section	kg	65
Groundframe	kg	230
Drive unit	kg	380

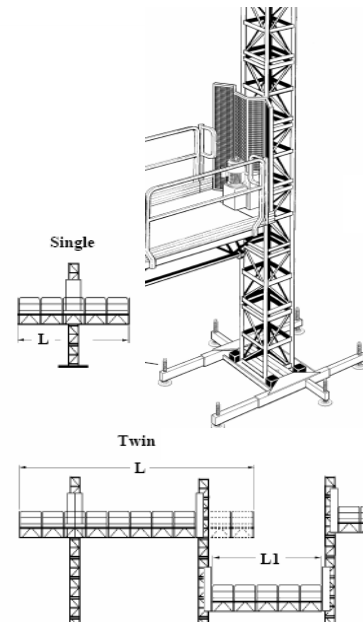

Electrical Data			
Rated power	kW	1 x 4,0	2x 4,0
Voltage / Frequency	V / Hz	380 - 440 , 50 / 60 Hz	
Control Voltage Frequency	Hz	50 or 60	
Starting current	A	47	2 x 47
Power consumption	KVA	5	2 x 5
Power supply fuses	A	16	32

Safety equipment
Mechanical safety device actuated at overspeed
Phase failure relay
Possibility to lower platform at power failure

HEK Manufacturing BV, PO Box 2, 5090 AA Middelbeers, The Netherlands

Tel: +31 (0) 13 514 8653, Fax: +31 (0)13 514 8630

E-mail: info@HEK.com, Web site: www.HEK.com